

Quote/Order Form




- Quote
 Order

Please sketch your lantern here.


- Please note all dimensions are to external face of timber kerb.
- Upon placement of your lantern order, an order confirmation will be generated which must be signed and emailed back.
- Please carefully read the lantern installation guide before filling in order details.

PLAN VIEW

example:

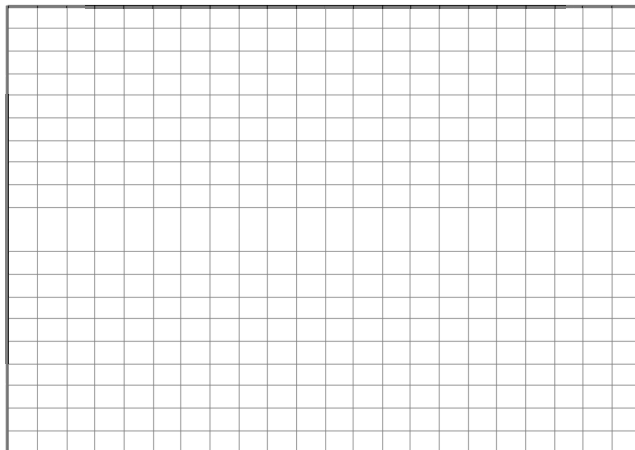

Typical design - Small



Typical design - Large



(Optional additional bars)

Company Name

Order Number

JOB REFERENCE

Company Contact

Telephone No.

Email

Delivery Address

.....

POSTCODE

Delivery Date Req

Quotation Ref

CRITICAL INFORMATION

***Required for structural snow / wind loading**

*Site Postcode

Please tick if height is greater than one storey.

Height above ground level

SPECIFICATION

1. Set out is always measured to external face of timber kerb.
2. Timber kerb should be a minimum of 150mm x 70mm wide (not supplied).
3. Width up to 3000 mm, length up to 4500mm (ext kerb sizes, min 100mm difference between width & length).
4. Fixed pitch of 20 degree.
5. Double ended hipped (rectangle shape).
6. Supplied glazed or unglazed for 24 mm sealed units - glazing overhangs, no gutter.
7. We will always design with the minimum number of bars - if you require additional and specific bars, please mark on drawing above.

ROOF MATERIALS

	PVCu White	PVCu Smooth Grey	Aluminium 9003 White 80% gloss	Aluminium 7016 Grey 30% gloss	Aluminium 9005 Black 60% gloss
External	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Internal	<input type="checkbox"/>	<input type="checkbox"/>			

ROTABOND SEALANT - MS POLYMER

Black (NCGS001B) No. Tubes Req: N.B. For use with Active Glass

GLASS OPTIONS - WARM EDGE SPACER

- Active Blue 1.2u 61% Active Clear 1.2u Active Neut 1.2u 61% Unglazed
- Active Blue 1.0u 86% Clear Tough 2.8u Bronze Antisun
- Celsius One 1.0u 83% Celsius Elite 0.9u 83% Celsius Clear 1.0u 58%

ROOF VENTS AND MECHANISM (mark plan)

- Brass Manual Spindle Manual Spindle and pole Manual Spindle and telescopic pole
- Chrome Manual Spindle Manual Spindle and pole
- Electric motor with digital thermostat and rain sensor Electric motor and rocker switch
- Electric without switch/thermostat (Motor only) Electric motor with thermostat (Rotary T50)

DISCLAIMER

The builder/installer is responsible for providing / checking structural timber deck. Building Regulation applications MAY be needed depending upon application. In certain commercial applications, restrictions in the use of the product may apply. Contact your local building authority.

Please sign and return to

sales@pcri.co.uk

SIGNED

DATE